Product data sheet

Specifications



① Discontinued

Main

AvatarOn, socket-outlet,	16A,	2 x
2P, universal, Wood		

E83426UES2_WD

() Discontinued on: Aug 15, 2024

let
product

Complementary

Rated current	16 A at 250 V AC 50 Hz
Socket number	2
Clamping connection capacity	1 x 42 x 4 mm ² for solid cable(s) 1 x 42 x 4 mm ² for stranded cable(s) 1 x 2.52 x 2.5 mm ² for solid cable(s) 1 x 2.52 x 2.5 mm ² for stranded cable(s)
Connections - terminals	Brass pillar Folded terminal
Material	Polycarbonate grid plate Polycarbonate surround
Device mounting	Surface Flush
Width	86 mm
Height	86 mm
Depth	26.7 mm
Embedding depth	17 mm

Environment

IP degree of protection	IP20
Maximum ambient air temperature for operation	35 ℃
Ambient air temperature for storage	-545 °C
Relative humidity	095 %
Environmental characteristic	No UV resistant
Operating altitude	5000 m

List Price displayed is VAT EXCLUSIVE.

Standards


IEC 60884-1

PCE
1
4.5 cm
8.5 cm
8.5 cm
100.0 g
BB1
10
9.5 cm
15 cm
19 cm
1 kg
CAR
60
21 cm
30 cm
39.5 cm
6 kg
23606481455208

Life Is On Schneider

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

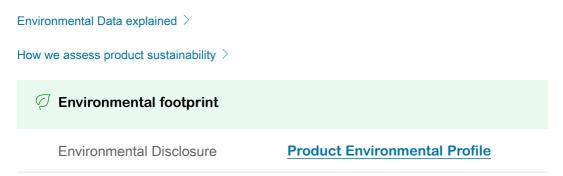

Use Better

S Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration
China RoHS Regulation	China RoHS declaration

Use Again

